



ELECTRICAL MAST CONNECTION MASTER FLASH®

Specifically designed for the Residential Roofing Industry,

**20
YEAR
WARRANTY**



ADVANCED OZONE RESISTANCE tested to...	EPDM 70 hour @ 500 pphm	
HIGH TEMPERATURE RESISTANCE		
Tested to	Intermittent	+135°C (+275°F)
	Continuous	+100°C (+212°F)
LOW TEMPERATURE RESISTANCE tested to...	- 55°C (-67°F)	
COMPRESSION SET minimum...	25%	



From this

To this

- ✓ **Weather Protection**
Made of E.P.D.M. ,
these flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.
- ✓ **Adaptable Base**
The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.
- ✓ The built in 20° pitch allows adaptability to almost any roof pitch including 45°
- ✓ No hassle stainless steel gripper to secure retrofit application

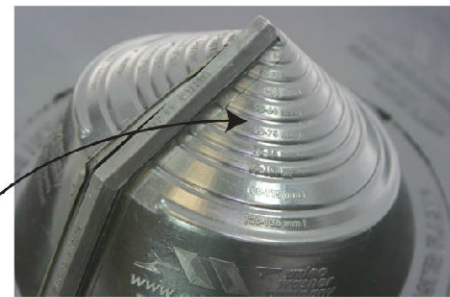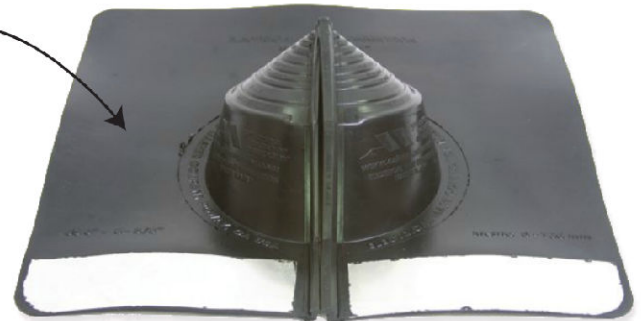

- ✓ **Modification Made Simple**
Easy to see pipe diameters make for painless on-site installation.

Pipe Size	Compound	Part No.		Flashing Details	
Electrical Mast Connection 0" - 5-3/8" (0 - 136mm)	Black EPDM	EMC101BS		A-Top opening diameter	Closed
				B-Cut to suit pipe size	0" - 5-3/8" (0 - 136mm)
				C-Base dimensions	15" (381mm)